


Colección Nordic
 Número De Estilo 4377V
 Construcción Módulo De Lvt Comercial De Tráfico Severo Con Fibra De Vidrio
 clase Class III, Type B
 Terminación ExoGuard+®
 U.s. Metric
 Dimensiones Nominales 7 in w x 48 in l | 18 cm w x 122 cm l
 Dimensiones Reales 7.25 in w x 48.00 in l | 18.42 cm w x 121.92 cm l

Desgaste De La Capa De Uso 22 mil (0.022 in) 0.56 mm
 Espesor Total Del Producto 0.197 in 5mm
 Perfil De Borde Micro-Biselado
 Installation Type Loose Lay
 Instalación Direct Glue Or Perimeter Glue
 Adhesivo Recomendado S150-95 Resilient Tile Spray, 4200 Resilient Tile 4
 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail or 4151 Multi-Use Premium 4 Gallon

Embalaje

Piezas Por Caja 8 pcs
 Área Por Caja 19.33 sq ft 1.8 sq m
 Peso Por Caja 37.88 lbs 17.18 kg

Método De Instalación Recomendado

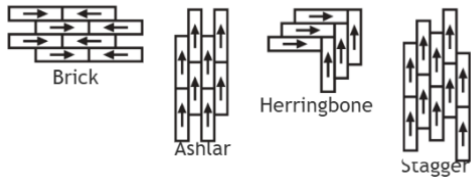

Desempeño + Pruebas

carga estática (ASTM F970) lbs	Passes (Modified), *1500
resistencia al calor (ASTM F1514)	Passes
resistencia a la luz (ASTM F1515)	Passes
resistencia a productos químicos (ASTM F925)	Passes
densidad de humo (ASTM E662, modo flameado)	Passes
panel radiante (ASTM E648)	Passes, Class I



*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

coeficiente de fricción (ASTM D2407, resistencia al ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces deslizamiento)



Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certificado

Climate Impact

Environmental Product Declaration (EPD)

Certificado Tercerizado De Acuerdo Con La Norma ISO 14025,
EN 15804, & ISO 21930:2017

Embodied Carbon (Cradle to Gate)

9.75 Kg Co₂/M²

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

Absence of Asbestos

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

Absence of Heavy Metals

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic
Compounds (VOCs) Optimization – 1 pt

Absence of Halogenated Flame Retardants

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

Ortho-Phthalates

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

FloorScore Certificate

X14 Material Transparency Part 1: Promote Ingredient
Disclosure Optimization – max 2 pts

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción
Ingredientes de materiales - Opción 1: Informe de ingredientes de
los materiales

Health Product Declaration (HPD) | 100 Ppm Disclosure

Crédito MR: Divulgación y optimización de productos de construcción
Declaraciones ambientales de productos - Opción 1: Declaración ambiental
de productos (EPD)

3rd Party Certified in Accordance with ISO 14025,
EN 15804, & ISO 21930:2017

Crédito EQ: Materiales de baja emisión Opción 1: Cálculos de

FloorScore® Certified

categoría de producto

Installation Guidelines
Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information.



Available Colorways



Aspen 77100
LRV 54.5 | L* 78.76
V2 - Slight Variation



Natural 77101
LRV 42.2 | L* 71.03
V2 - Slight Variation



Honey 77103
LRV 26.8 | L* 58.83
V2 - Slight Variation



Alder 77104
LRV 25.5 | L* 57.57
V3 - Moderate Variation



Calm 77111
LRV 36.8 | L* 67.16
V2 - Slight Variation




Blonde 77112
LRV 37.6 | L* 67.73
V2 - Slight Variation



Driftwood 77120
LRV 30.6 | L* 62.16
V3 - Moderate Variation



Birch 77140
LRV 35.8 | L* 66.35
V2 - Slight Variation




Fir 77155
LRV 42 | L* 70.85
V2 - Slight Variation



Radiant 77710
LRV 21.1 | L* 53.08
V2 - Slight Variation



Redwood 77720
LRV 22 | L* 54.07
V2 - Slight Variation



Elm 77721
LRV 22.7 | L* 54.81
V2 - Slight Variation



Balance 77755
LRV 30.7 | L* 62.29
V2 - Slight Variation



Golden 77756
LRV 15.2 | L* 45.94
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.



MELAVINYL



Baldosas Podotáctiles

Dirección: Calle Juan Roberto Acevedo 210 - Pueblo Libre

Correo: Melavinyl.ventas@gmail.com

Telefono: 921-543-278 / 929-198-212

Para más información visite www.melavinyl.com

